


## DATA SHEET

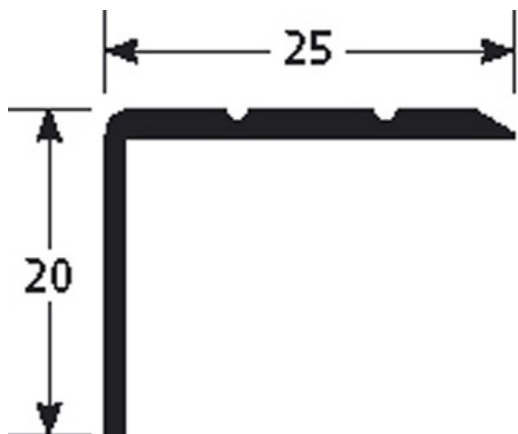

### DESCRIPTION

Drilled aluminium stair-nosing  
To secure stairs and reduce slip risk  
Drilled - countersunk: to be screwed  
14 holes, first and last one at 83 mm  
Holes are drilled, countersunk and deburred  
Supplied with screws and plugs

### USE

For overlapping a floor covering or a parquet or concrete floor.  
Indoor use

### REFERENCE

Ref : 1519

### MATERIAL

REACH compliant.  
Aluminium profile : 6060-T5, N755-2 standard top-of-the-range alloy, thermally treated for higher hardness.

### FITTING MODE

Cut the profile to the desired length. Locate the holes and drill into the concrete. Place the ROMUS plugs 194143. Position the profile and fasten with the screws of the same colour supplied with the profile.

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :

## DATA SHEET

### > MAINTENANCE

For daily cleaning, use standard detergents. In case you want to use a sodium, ammoniac or acid based cleaner, carry first out a preliminary test.

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :