


Data sheet

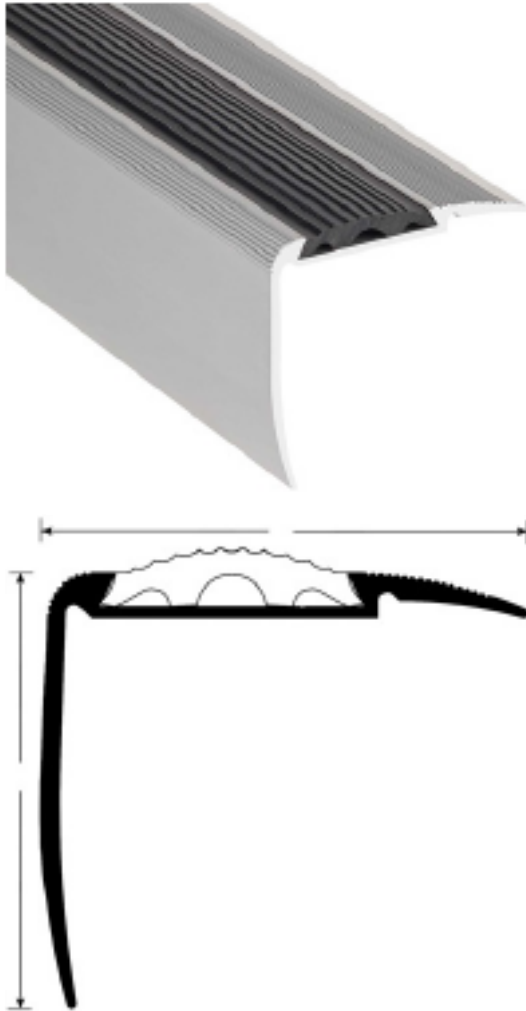

DESCRIPTION

Aluminium stair nosing with non-slip PVC strips makes stairs safer and reduces the risk of slipping.

Drilled - countersunk: for screw fitting

18 holes with the first and last ones spaced 83 cm apart.

The holes are drilled, countersunk and then de-burred from underneath.

Inserts available; see catalogue

USE

For fitting when installing a floor covering or wood floor For indoor use

REFERENCE

Ref: 1486

MATERIAL

Aluminium profile: top quality 6060-T5, N755-2 alloy, heat treated to maintain maximum hardness. 15 micron anodising. Black non-slip PVC insert complying with REACH legislation

FITTING METHOD

Cut the profile to the desired length. Mark the holes and drill the substrate. Fit Romus 94154 plugs. Fit the profile and secure with 94137 screws. Insert the non-slip PVC strip.

The information contained in this document is provided as an indication only. Romus declines all liability. The user or specifier must check the compatibility of the product's technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect:

Project:

Email:

Tel:

Distributor:

Tel:

Email:

Data sheet



> Recommended maintenance

For daily maintenance, use standard cleaning products. If using a product based on soda, ammonia or acid, carry out a prior test, keeping clear of the inserts.

The information contained in this document is provided as an indication only. Romus declines all liability. The user or specifier must check the compatibility of the product's technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect:

Project:

Email:

Tel:

Distributor:

Tel:

Email: