


## Technical Data Sheet

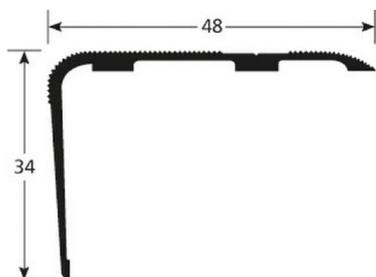

### > Recommended maintenance

For daily cleaning, use standard detergents. In case you want to use a sodium, ammoniac or acid based cleaner, carry first out a preliminary test.

### DESCRIPTION

Drilled aluminium stair-nosing  
To secure stairs and reduce slip risk  
Drilled - countersunk: to be screwed

Holes are drilled, countersunk and deburred

### PURPOSE

For overlapping a floor covering or a parquet or concrete floor.  
Indoor use

### ART. NUMBER

Ref.15003 length: 3.00m  
Ref. 1501 length: 4.00m

### MATERIAL

#### Alu silver

6060-T5 – N755-2 type top-of-the-range alloy, thermally treated for higher hardness. Anodised (no clamping marks) in greatest thicknesses (15 microns). Colours are those defined by "R.A.L." European standards.

REACH compliant

### HOW TO INSTALL

Cut the profile to the desired length. Locate the holes and drill in the subfloor. Place the ROMUS plugs 94154. Position the profile and fasten with screws 94136.

Information contained in this document is indicative only. ROMUS accepts no liability in connection therewith. The user or the specifier must check the compatibility of the product's technical data with the actual situation. ROMUS reserves the right to change all or part of this document without prior notice. :

Architect/Investor :

Project :

Email :

Tel :

Distributor :

Tel :

Email :