





**3390**  
 Alu Silver  
 3 mm



**3391**  
 Alu Silver  
 6 mm



**3395**  
 Alu titanium  
 3 mm



**3396**  
 Alu titanium  
 6 mm

### INSTALLATION PROCESS


The overlay tile is placed up to the edges of each side of the profile.

Fasten the profile to each side of the floor joint, either with MS Polymer adhesive or screws (for drilled profiles). When positioning the profiles, make sure to keep enough room for expansion (see diagram below).



It is recommended to put an inclined smoothing compound on the profile's two outer edges before placing the floor tile.

For more information, watch the instruction video.

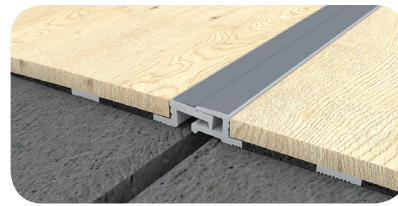

### DESCRIPTION

Special LVT mobile expansion profiles. Allows LVT floors to expand by  $\pm 2.5$  mm on both sides, thereby adapting to the building's movement. Discreet join since, once fitted, only 14 mm of profile is visible.

Width: 14 mm

Height: 3 or 6 mm depending on reference

Length: 2.70 m

### USE

For use on LVT and PVC floors. With a floor expansion joint less than 10 mm wide.

### REFERENCES

- **3390**  
 LVT ALU SILVER EXPANSION PROFILE DRILLED 3MM 2,70M
- **3391**  
 LVT ALU SILVER EXPANSION PROFILE DRILLED 6MM 2,70M
- **3395**  
 LVT ALU TITANIUM EXPANSION PROFILE DRILL 3MM 2,70M
- **3396**  
 LVT ALU TITANIUM EXPANSION PROFILE DRILL 6MM 2,70M

### MATERIAL

Alu silver and alu titanium.  
 REACH compliant.

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Phone :

Email :

Project :

Distributor :

Phone :

Email :