


Technical Data Sheet - GB

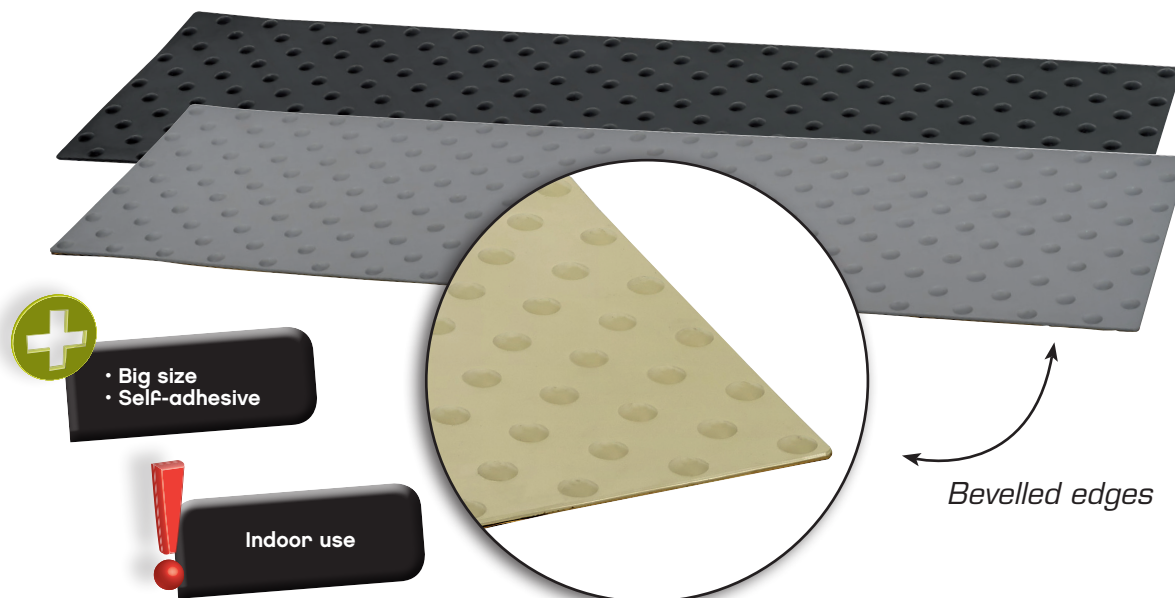

TILE DIMENSIONS: 1350 x 400 mm
THICKNESS: 7 MM

PRODUCT DESCRIPTION

"ACCESSDAL" TACTILE TILES are an on-ground orientation system. These tactile tiles are intended for alerting blind and partially sighted people to imminent dangers on their way, like: flights of stairs, underground platforms ...

Their studs can be detected by foot or a white stick.

This device comes within the scope of Act n° 91-663 of July 13, 1991, Accessibility for people with disabilities, and of Decree n° 99-756 of August 31, 1999.

From January 1st, 2015, all public establishments must be entirely accessible to people with disabilities. Regulations on accessibility require that public establishments (ERP) meet accessibility requirements and standards in 2015.

Accessibility must be global and understood in a broad sense. Physical, intellectual and sensorial dimensions should all be considered. Work should be possibly carried out in particular on: pedestrian crossings, traffic lights, emergency call boxes, stairs, sidewalks.

Any flight of stairs of a minimum of three steps must meet the following requirements: at the top of a staircase, a special floor covering must be placed at a distance of 50 cm from the first step, in order to alert people by means of a tactile change underfoot as well as a visual contrast. Decree of August 1st, 2006, modified by the decree of November 30th, 2007

Technical Data Sheet - GB

TECHNICAL SPECIFICATIONS

"ACCESSDAL" TACTILE TILES are made of **polyurethane resin**

Tile properties:

- Fire rating: M2 - (Euroclasses «C»)
- High elasticity
- Easy installation
- Good tear resistance
- Highly nonslip
- Anti-fouling

Self-coloured, **"ACCESSDAL" TACTILE TILES** exist in different colours:



NOIR



RAL 7040



RAL 1015



RAL 9016

INSTALLATION

SELF-ADHESIVE SYSTEM:

Cleaning: The substrate should be clean, dry and free from any non-adherent material (dust, grit, grease, oil, etc.), perfectly smooth (tiles, resin flooring, epoxy, asphalt, parquet, smooth concrete, soft flooring...).

Application steps:

- Establish the application area
- Remove the film from the back of the tile
- Place the tile
- Apply some light pressure so as to avoid air bubbles.
- Check that tile edges stick well to the support.

In the case of an irregular substratum, level it so as to ensure a better adhesion of the tile.

Example: Tiling joints should be filled with tile adhesive. Do not apply the tile until the adhesive is completely dry.

ADDITIONAL DATA

Storage: 1 year in original unopened container protected from moisture and freezing.