


9030

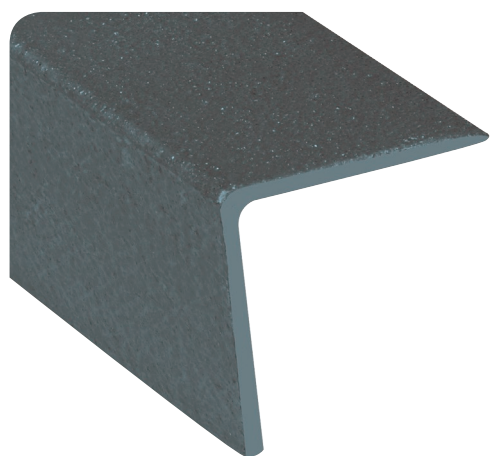

9031

DESCRIPTION

Non-slip "ALL-GRIP" range stair nosing which makes going up and down stairs safer.

Profiles not pre-drilled, to be secured using screws (may additionally be glued for sound-proofing purposes).

Dimensions : 55 x 55 mm

Length : 3 M

Thickness : 3 mm

Colours available : Yellow and black

USE

Outdoor non-slip stair nosing.

REFERENCES

- **9030**
ALL-GRIP STAIRNOSING YELLOW 55 X 55MM 3,00M
- **9031**
ALL-GRIP STAIRNOSING BLACK 55 X 55MM 3,00M

MATERIAL

The "ALL-GRIP" range comprises products designed using very strong glass fibre that has an extremely durable grainy surface that is also water-proof and rot-proof.

SRT slip resistance tester (pendulum) as per standard EN 14321 - Wet floor: 65 - Dry floor: 85 (Proven risk if <35).

INSTALLATION PROCESS

Ensure before you start that the substrate is clean and free of anomalies.

1- Drill : Stair nosings should ideally be drilled 50 mm from each edge and at roughly 30 cm intervals. Adjust the profile as desired, hold it in place and through into the substrate (for concrete, use an expansion anchor).

2- Fixing : fix using 9009 (or self-drilling) screws. The operation may be supplemented by adding MS Polymer-MS Express adhesive mastic, ref. 93021.

MAINTENANCE

Dried dust and dirt can be removed easily with a stiff brush.

If liquids have been spilt on it or if the dirt is ground in, detergents can be used. Cleaning products should always be tested on an inconspicuous area before you start cleaning.



The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Phone :

Email :

Project :

Distributor :

Phone :

Email :