


# ENTRANCE MATTING ROMAT GT ROMAT GT - 22 MM REF. 8490

## DATA SHEET



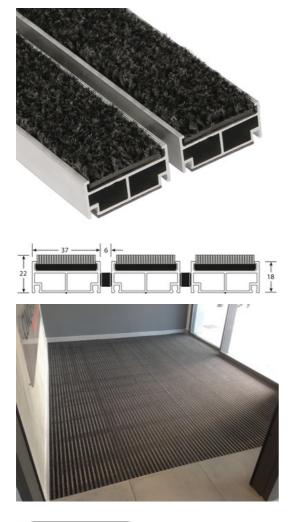

### DESCRIPTION

ENTRY CLEAN ENTRANCE MATS PURPOSE OF ENTRY CLEAN ENTRANCE MATS:

#### USE

Heavy traffic Thickness = 22 mm Zone 2: INDOOR use Roll-up open structure

#### REFERENCE

Ref : 8490

 $Made \ to \ measure: \ download \ the \ specific \ ROMUS \ Order \ Form \ http://www.romus.org/tmp/order_form/uk.pdf$ 

#### MATERIAL

Mill aluminium profiles, standard 6060-T5, N755-2. Heavy traffic polypropylene carpet insert. REACH compliant

#### **FITTING MODE**

INSTALLATION: To be laid in a sealed ROMUS matwell frame 6100 with ROMUS corner angles 161104 and feet 161103, or laid directly on the floor with ROMUS bevelled access profile 6115 and ROMUS corner angles 16117 for level adjustment. Made-to-measure frames available upon request.

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :
Project :
Email :
Tel :
Distributor :
Tel :
Email :