


## DATA SHEET

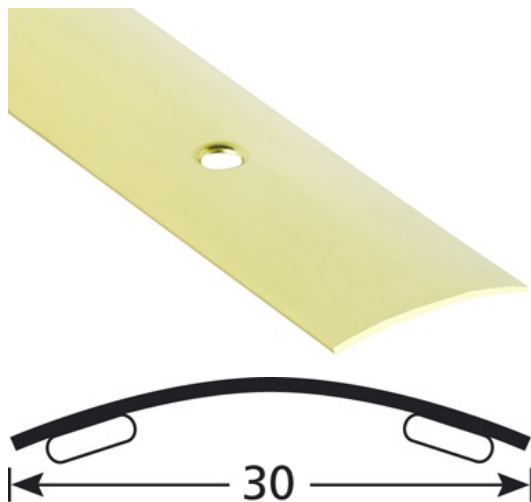

### DESCRIPTION

Self-adhesive solid brass profile to make a transition between 2 floor coverings of the same level to be glued on a clean surface (no dust, no grease)

### USE

For overlapping a floor covering or a parquet or concrete floor. Indoor use

### REFERENCE

Ref : 2012

### MATERIAL

Our products are made of this material only when selecting "high-alloy", which is 67 % copper and 33 % zinc. Mirror polish finish, except for stair rods (polished varnished). REACH compliant

### FITTING MODE

Quick to install. Cut the profile to the desired length. Make sure that the support is clear and clean from any grease and dust. Remove the silicone-coated paper. Position the profile and press down to secure.

### > MAINTENANCE

For daily cleaning, use standard detergents. In case you want to use a sodium, ammoniac or acid based cleaner, carry first out a preliminary test.

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :