


## DATA SHEET

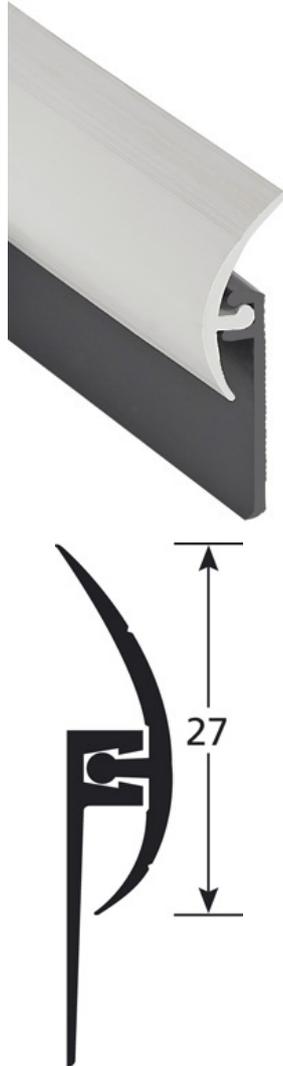

### DESCRIPTION

PVC profile to be stuck  
For the finishing between a floor covering and a wall covering  
to be glued on a clean surface (no dust, no grease)

### USE

To be installed as skirting  
Indoor use

### REFERENCE

Ref : 2422

### MATERIAL

Co-extruded PVC profile having a rigid part and a soft PVC sealing lip.  
REACH compliant

### FITTING MODE

Cut the profile to the desired length. Insert as many clips as needed (one clip every 50 cm). We advise you to use a MS polymer adhesive. Position the profile and push the whole assembly hard into place.

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :

## DATA SHEET



### > **MAINTENANCE**

Use standard cleaners (neutral detergents)

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :