


DATA SHEET

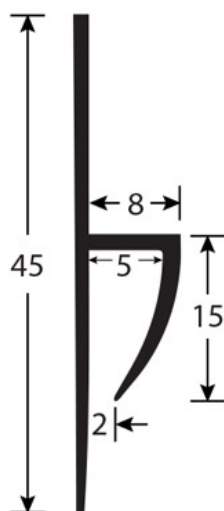

DESCRIPTION

PVC profile to be stuck
For the finishing between a floor covering and a wall covering
For junctions between wall tiling and coved PVC flooring (for ex. in canteen kitchens)
to be sealed

USE

To be installed as skirting
Indoor use

REFERENCE

Ref : 2425

MATERIAL

REACH compliant

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :

DATA SHEET



> MAINTENANCE

Use standard cleaners (neutral detergents)

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :