


## DATA SHEET

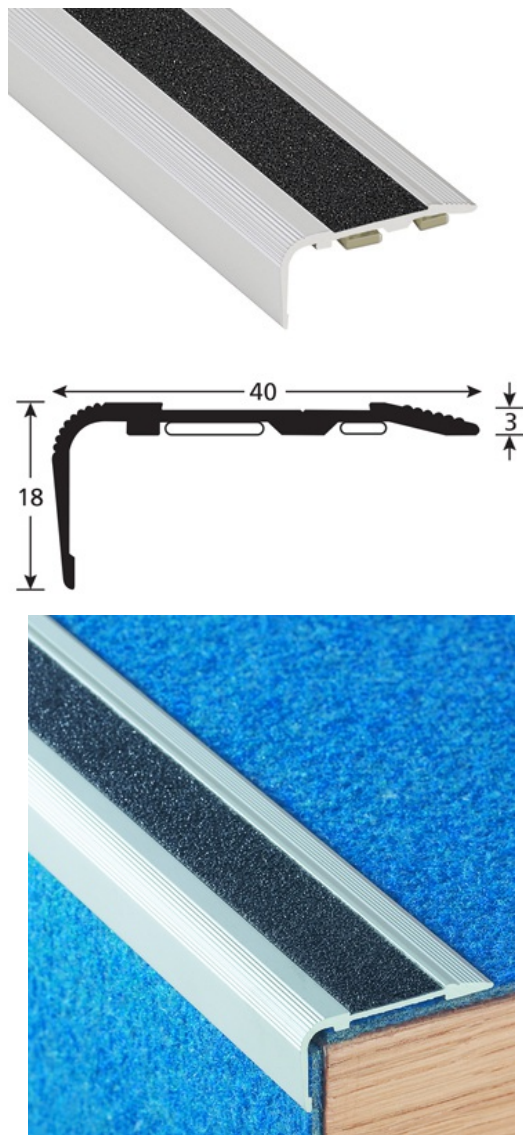

### DESCRIPTION

Self-adhesive aluminium stair-nosing  
To secure stairs and reduce slip risk  
Can also be used with photoluminescent carborundum inserts:  
For available inserts, see ROMUS catalogue

### USE

For overlapping a floor covering or a parquet or concrete floor.  
Indoor use

### REFERENCE

Ref : 23713

### MATERIAL

Aluminium profile: 6060-T5, N755-2 standard top-of-the-range alloy, thermally treated for higher hardness. Anodised 15 micron. Black anti-slip carborundum insert  
REACH compliant

### FITTING MODE

Cut the profile to the desired length. Remove the silicon-coated paper protecting the Butyl. Position the profile and press down to secure. Make the aluminium profile free of grease, by using isopropyl alcohol. Then install and press the corresponding carborundum insert.

### > MAINTENANCE

For daily cleaning, use standard detergents. In case you want to use a sodium, ammoniac or acid based cleaner, carry first out a preliminary test on the profile, avoiding the insert.

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :