
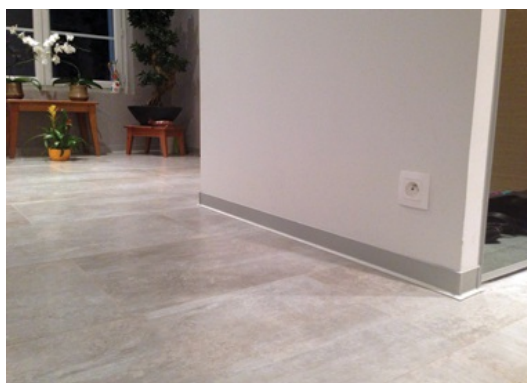


DATA SHEET

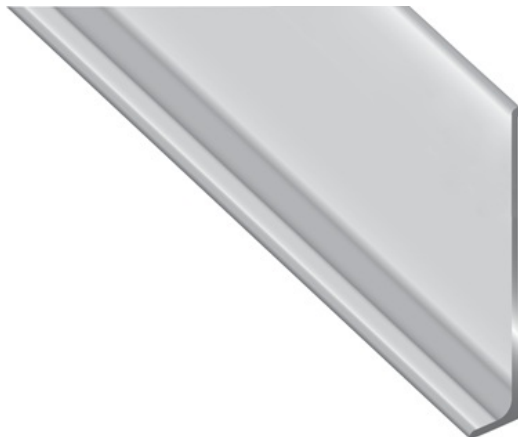

DESCRIPTION

Undrilled aluminium profile
For the finishing between a floor covering and a wall covering
to be glued on a clean surface (no dust, no grease)

USE

To be installed as skirting
Indoor use

REFERENCE

Ref : 2220

MATERIAL

Aluminium profile: 6060-T5, N755-2 standard top-of-the-range alloy, thermally treated for higher hardness. Anodised 15 micron. Black anti-slip carborundum insert
REACH compliant

FITTING MODE

Make sure that the support is clear and clean from any grease and dust. Use an acrylic adhesive, to be spread with an A2 spatula.
Edges can be welded (use ROMUS welding kits).

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :

DATA SHEET

> MAINTENANCE

Use standard cleaners (neutral detergents)

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :