ROMUS®

▶ STAIR-NOSINGS
▶ "CARBORUNDUM INSERT" RANGE
▶ BEVELLED EDGE - 36 MM REF. 1392

DATA SHEET

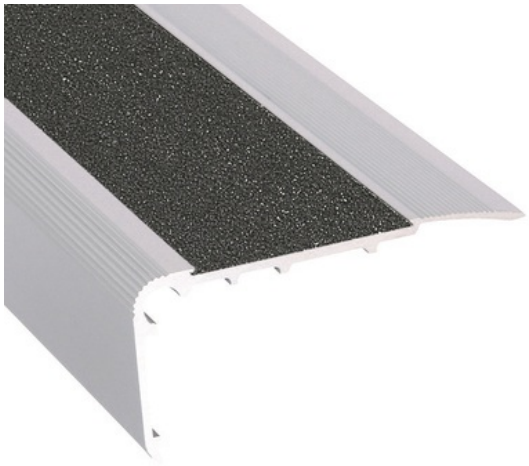

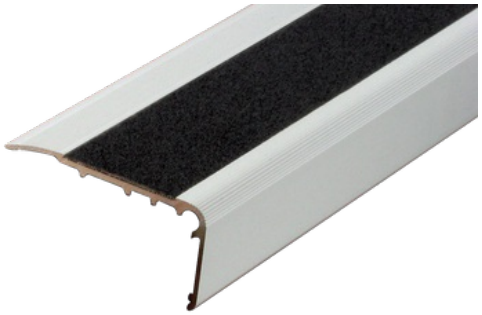

DESCRIPTION

Nez de marche anti-dérapant bord sifflet.
Permet de sécuriser les escaliers et de réduire les risques de glissade.

Type : percé
Largeur du profilé : 67 mm
Hauteur du profilé : 32 mm
Largeur de la bande : 36 mm
Longueur : 4 M

Livré avec bande noire 36 mm adhésive, non fixée.

USE

Se pose en recouvrement d'un revêtement de sol ou d'un parquet.
Utilisation en intérieur.

REFERENCE

Ref : 1392
NM BORD SIFFLET 36MM ALU INC PERCE+BDE NOIRE 4 M

MATERIAL

Aluminium incolore.
Alliage haut de gamme du genre 6060-T5 – N755-2 traité thermiquement pour lui conserver une plus grande dureté. Anodisé (sans trace de pince de maintien) dans les épaisseurs les plus importantes pratiquées (15 microns).
Antidérapant : insert carborundum antidérapant, à insérer dans le nez de marche.
Conformité REACH.

FITTING MODE

Profilé à visser.
Coupez le profilé à la longueur souhaitée, repérez les trous, percez le support, placez les chevilles et vissez.

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :
Project :
Email :
Tel :

Distributor : Tel : Email :