

IMPORTANT
Once mat orders have been received and confirmed, **THEY CANNOT BE CANCELLED.**

OBLIGATORY INFORMATION
We need this detail to confirm the specifications of the mat with regard to the traffic and location. Name / Type of Site (e.g., St. Exupéry School, St. Charles Station, etc.)
.....
 New
 Renovation

1 **PURCHASE ORDER NO:**
 QUOTE


MAT Réf.		Designation	
SEALED FRAME Ref.		Designation	
Angle connector Ref.	Qty	Fixing foot Ref.	Qty

Date:
COMPANY:
Person to contact:
Adress:
Telephone:
Fax:
Email:.....



2 Indicate if dimensions are: (check box)

<input type="checkbox"/>	Net dimensions	Mat to be made as it is
<input type="checkbox"/>	Inside measurements of matwell frame	Frame already installed
<input type="checkbox"/>	Inside measurements of matwell	<input type="checkbox"/> ROMUS frame will be sealed Ref 6100, 6101, 6113 <input type="checkbox"/> No frame will be sealed
<input type="checkbox"/>	Provided by a template	Provide a template (ideally a piece of PVC flooring)

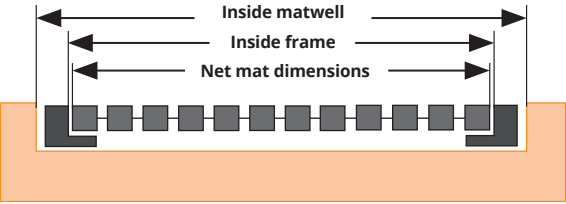

In case you cannot give us the dimensions of your mat using the below diagram, then a template is needed! Read the instructions on page 2 or feel free to contact us.




- Matwell surface must be perfectly flat. Apply a levelling compound if necessary.
- Once sealed, ROMUS matwell frames 6100, 6101 and 6113 have a visible 6mm-thick edge when installed.

3 We will calculate the appropriate sets according to the information provided in point 2.

4 **FILL IN THE 5 MEASUREMENTS L1 - L2 - P1 - P2 - D = THE SIZE OF THE MAT WILL MATCH YOUR EXACT REQUIREMENTS!**

! * Only indicate the diagonal if the 4 angles are not 90°

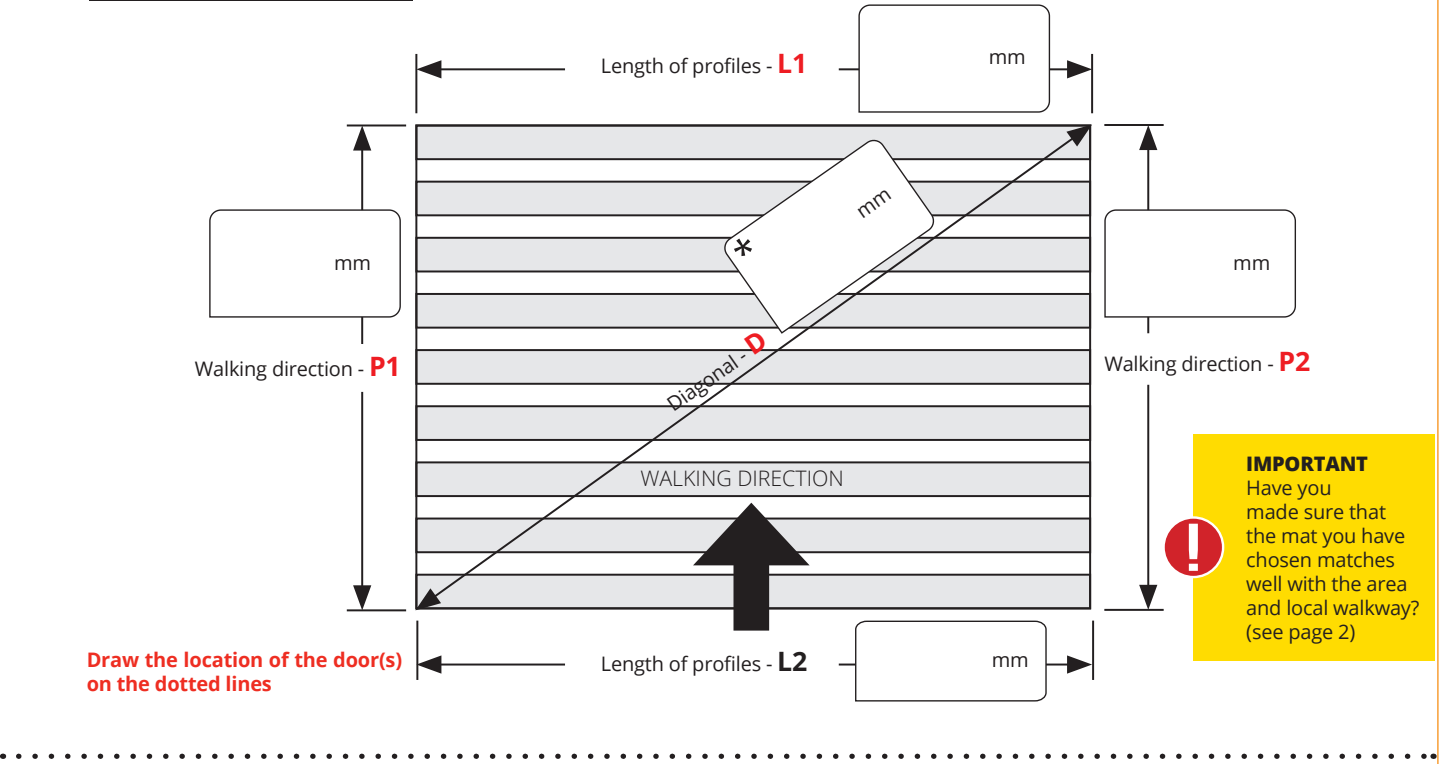

IMPORTANT
Have you made sure that the mat you have chosen matches well with the area and local walkway? (see page 2)

Whenever possible, we try to make our mats **in a single piece**. However, with large dimensions (see details on page 2), it is better to divide the mat into several pieces. This will make handling easier. An installation diagram will be provided for these mats.

HOW TO TAKE MEASUREMENTS FOR TECHNICAL MATTING?


We require very precise information in order to minimise the risks when we are installing technical matting. That is why it is important to fill out the entire order form on page 15.

Before taking any measurements, make sure that the floor area where the matting will be placed is perfectly flat. If not, you will need to level it.

The plan on the order form on page 15 must be filled in for any STANDARD square or rectangular shaped mat. For any other shape a template will be required.

- If there is already a matwell with no frame:

- take the **MEASUREMENTS INSIDE THE MATWELL** and indicate whether a frame will be installed or not. This information is very important as it helps us to establish how much room is needed on each side to allow the mat to be removed and taken out for maintenance.

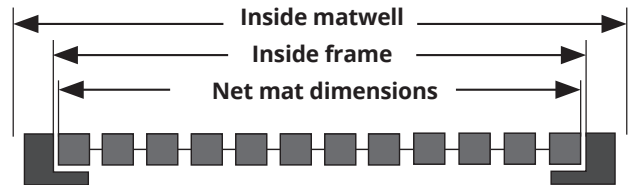

- If there is already a matwell and the frame is sealed:

- take the **MEASUREMENTS INSIDE THE FRAME**. This will help us to establish how much room is needed on each side to allow the mat to be removed and taken out for maintenance.

- If you wish to order a mat with exact dimensions:

- take the **NET MEASUREMENTS OF THE MAT**, which will be made to the exact measurements given.

- If the measurements are too difficult to take or if the shape is NOT STANDARD

- create a **TEMPLATE** and send it to us.

LARGE SIZE MATS

Whenever possible, we try to make our technical mats in a single piece. However, with large dimensions it may be necessary to divide the mat into several pieces based on the following criteria:

Mat in several pieces if higher then the following maximum values:	Max. "length of the profiles" dimension (mm)	Max. "walking direction" dimension (mm)	Max. weight (kg)
ROMAT	2500	-	60
ROMAT GT	3000	-	60
ROBUSTE - LIGHT	2300	500	40
REVERSE	2300	600	40

For mats that are longer and/or heavier than the criteria given above, a **surcharge** will be added to cover specific packaging and shipping costs.

Some weigh indications for some of our mat references:

- 1 m² of Romat 12 mm weighs 9.5 Kg.
- 1 m² of Romat 17 mm with PVC inserts weighs 16.5 Kg.
- 1 m² of Robust weighs 17.5 Kg.




Please do not forget to indicate the position of doors if the mat is in several pieces.


BE CAREFUL OF THE WEIGHT OF THE MATTING IF HANDLED BY A SINGLE PERSON!!!

If the dimension of the length of the profiles is longer than the limits shown in the table above, the mats will need to be manufactured in several pieces as follows:

RIGHT

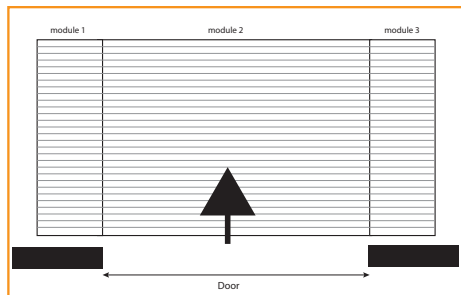


RIGHT

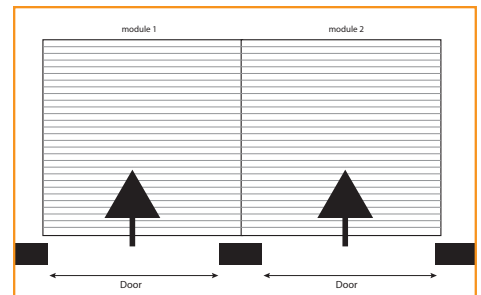

Never manufactured in the following conditions:

WRONG

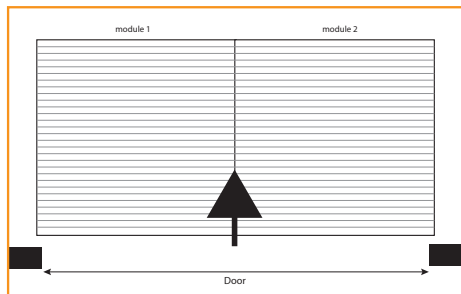

WRONG

