


### TECHNICAL SHEET\_GB

Ref. 95255



**WARNING:**  
welding machine delivered without a torch.  
(Order separately)

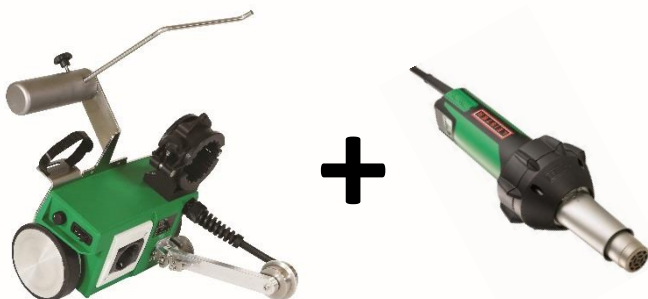

Minifloor turns your hot air blower manual appliance automatic welder Minifloor hot air within a few seconds, which increases the quality of welding, to facilitate the work and significantly reduce the time needed to work . Its use is advantageous from a weld length of 1.20 m and due to its low weight of 5.3 kg it can be transported effortlessly. The device Minifloor soda from the edge, cordless almost two times faster than by hand. It is ideal for short seams and small surfaces.



**Professional, economic and incredibly versatile:**  
The device MINIFLOR for real pros of laying floor coverings.

*Les informations contenues dans ce document sont communiquées à titre indicatif. Elles ne peuvent engager la responsabilité de ROMUS. L'utilisateur ou le prescripteur vérifiera la compatibilité des données techniques du produit avec la situation réelle. La société ROMUS se réserve le droit de modifier tout ou une partie de ce document sans préavis.*

Architecte:

Projet:

Email:

Tél:

Distributeur:

Tél:

Email:



**Backwards compatible:** even the oldest TRIAC models can be connected easily with interchangeable insert.



**Assembly / disassembly of the reel without tool:** If the reel can not be used, the welding rod can still be introduced in a controlled manner in the quick welding nozzle.



**Incredibly fast:** despite its reduced weight, the MINI FLOOR device allows a welding speed of about 2 m / min, almost double the speed in manual welding.



**By the quick release locking system for the TRIAC bracket** allows mounting and dismounting of the TRIAC device in seconds. The power of the manual device is integrated into the control unit Minifloor, as the cable fixing device.



**Integrated start sensor:** the timer function individually adjustable start on the controller (Drive Unit) Minifloor adapts the start the specific needs at any time. Along guide arm also provides excellent stability of the trajectory.



**The minimum distance from the wall of only 51 mm** allows easy welding of the most common and even vertical junctions gorges. The low height of the unit allows continuous welding since the passage is at least 295 mm height.





- Only automatic welding machine can be connected with ease to a hot air blower device manual.
- advantageous use from a weld length of  $\varnothing$  1.2 m
- Swiss Quality and Reliability
- By welding from the edge, one pass is now necessary along the weld seam, which saves time!
- Weighing 6.6 kg with TRIAC AT / nozzles, the Minifloor device is a real lightweight, which carries very easily.
- Perfect stability of the trajectory through the training to 2 axes.

Specifications MINI FLOOR	Only control unit	With TRIAC AT
Voltage (V)	100-230	100/120/230
Frequency (Hz)	50-60	50/60
Power (W)	15	1600
Temperature (°C)		40-620
Air flow range(%)		20-100%
driving speed(m/min)	0.5-5.0	0.5-5.0
electronic system	regulated	Set / screen
wind tunnel		brush motor
Bead width (mm)		2.5/3.5
Dimensions(L x l x H ) (mm)	310 x 225 x 245	495x225x295
Weight (kg)	5.3	6.6 (with nozzles)
Conformity mark		
Protection class I		