
DATA SHEET







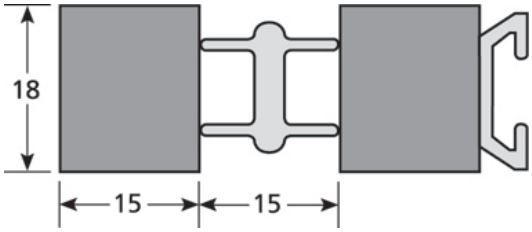

DESCRIPTION

ENTRY CLEAN ENTRANCE MATS
ROMUS ENTRY CLEAN combined entrance mats are designed to prevent as efficiently as possible the penetration of dust, moisture and other residues carried into buildings by visitors' soles, and to avoid any dirtying and premature wear of flooring.
PURPOSE OF ENTRY CLEAN ENTRANCE MATS:

USE

Heavy traffic
Zone 2: INDOOR use
Thickness = 12 mm
Zone 2: INDOOR use
Rigid closed structure

REFERENCE

Ref : 8000
Made to measure: download the specific ROMUS Order Form
http://www.romus.org/tmp/order_form/uk.pdf

MATERIAL

30% recycled aluminium profiles EN-755. Surface-scraped polyamide fibre rubber insert
REACH compliant
REACH compliant
Fire rating: Bfl s1

FITTING MODE

INSTALLATION: To be laid in a sealed ROMUS matwell frame 6100 with ROMUS corner angles 161104 and feet 161103, or laid directly on the floor with ROMUS bevelled access profile 6115 and ROMUS corner angles 16117 for level adjustment. Made-to-measure frames available upon request.

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :
Project :
Email :
Tel :
Distributor : Tel : Email :

DATA SHEET

FIRE

Fire Certificate - REVERSIBLE Entrance Mats.pdf

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :
Project :
Email :
Tel :
Distributor : Tel : Email :