


## DATA SHEET

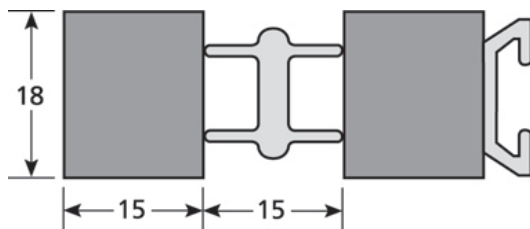

### DESCRIPTION

#### ENTRY CLEAN ENTRANCE MATS

ROMUS ENTRY CLEAN combined entrance mats are designed to prevent as efficiently as possible the penetration of dust, moisture and other residues carried into buildings by visitors' soles, and to avoid any dirtying and premature wear of flooring.

PURPOSE OF ENTRY CLEAN ENTRANCE MATS:

### USE

Heavy traffic

Zone 2: INDOOR use

Thickness = 12 mm

Zone 2: INDOOR use

Rigid closed structure

### REFERENCE

Ref : 8000

Made to measure: download the specific ROMUS Order Form

[http://www.romus.org/tmp/order\\_form/uk.pdf](http://www.romus.org/tmp/order_form/uk.pdf)

### MATERIAL

30% recycled aluminium profiles EN-755. Surface-scraped polyamide fibre rubber insert

REACH compliant

REACH compliant

Fire rating: Bfl s1

### FITTING MODE

INSTALLATION: To be laid in a sealed ROMUS matwell frame 6100 with ROMUS corner angles 161104 and feet 161103, or laid directly on the floor with ROMUS bevelled access profile 6115 and ROMUS corner angles 16117 for level adjustment. Made-to-measure frames available upon request.

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :



- ▶ ENTRANCE MATTING
- ▶ ROMAT REVERSE
- ▶ ROMAT REVERSE 18 MM REF. 8000

## DATA SHEET

### FIRE

Fire Certificate - REVERSIBLE Entrance Mats.pdf

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :