


## DATA SHEET

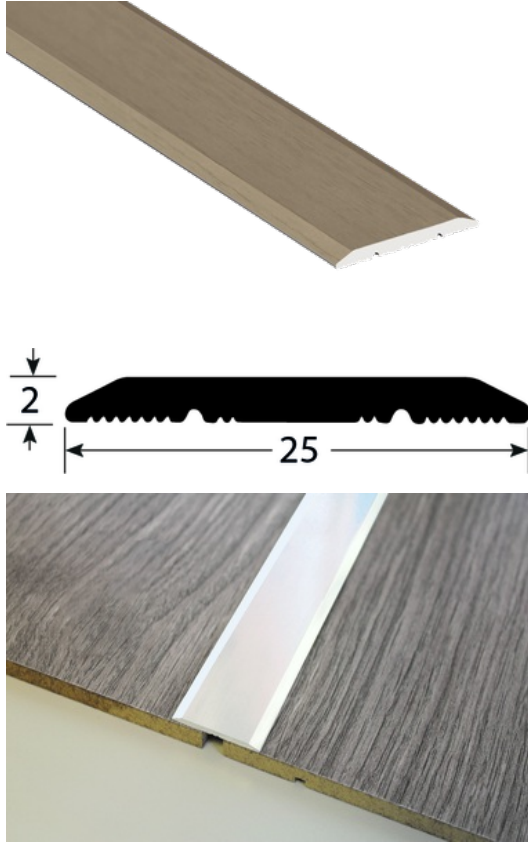

### DESCRIPTION

Drilled aluminium titanium profile to make a transition between 2 floor coverings of the same level.

Holes are drilled, countersunk and deburred.  
Supplied with screws and plugs.

Width : 25 MM  
Length : 3M

### USE

For overlapping a floor covering or a parquet or concrete floor.  
Indoor use.

### REFERENCE

Ref : 1592  
FLAT ALU TITANUM 25MM DRILLED COVERSTRIP 3M

### MATERIAL

REACH compliant

### FITTING MODE

Cut the profile to the desired length. Locate the holes and drill into the concrete. Place the ROMUS plugs 194143. Position the profile and fasten with the screws of the same colour supplied with the profile.

### > MAINTENANCE

For daily cleaning, use standard detergents. In case you want to use a sodium, ammoniac or acid based cleaner, carry first out a preliminary test.

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :