


DATA SHEET

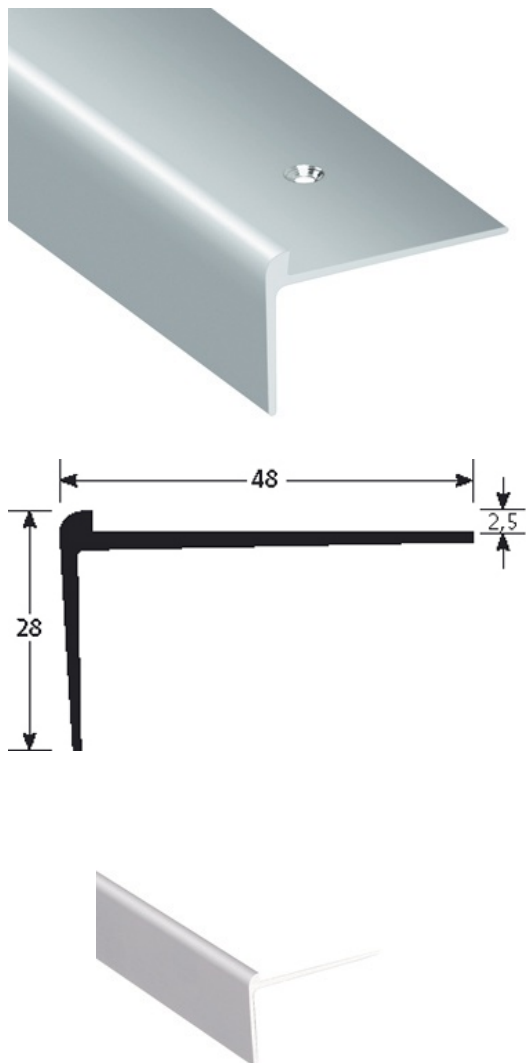

DESCRIPTION

Drilled aluminium stair-nosing
To secure stairs and reduce slip risk
Drilled - countersunk: to be screwed
14 holes, first and last one at 83 mm
Holes are drilled, countersunk and deburred

USE

For edging and finishing a floor covering
Indoor use

REFERENCE

Ref : 1619

MATERIAL

REACH compliant

FITTING MODE

Cut the profile to the desired length. Locate the holes and drill in the subfloor. Place the ROMUS plugs 94154. Position the profile and fasten with screws VVVV.

> MAINTENANCE

For daily cleaning, use standard detergents. In case you want to use a sodium, ammoniac or acid based cleaner, carry first out a preliminary test.

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :



- ▶ STAIR-NOSINGS
- ▶ "DECORATION" RANGE
- ▶ EDGE 2.5 MM REF. 1619

DATA SHEET

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :