


## DATA SHEET

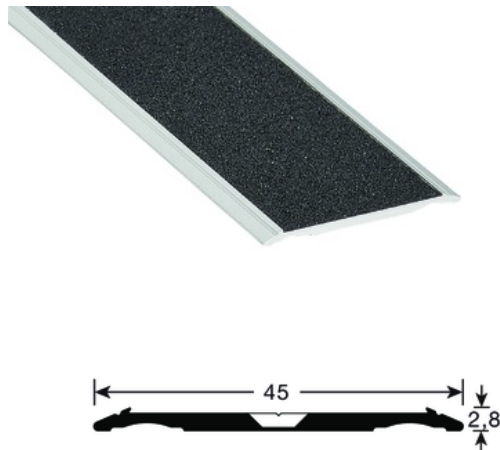

### DESCRIPTION

Nez de marche plat en aluminium avec bande antidérapante carborundum de 36 mm de large et 1 mm d'épaisseur (Livré sans bande).

Permet de sécuriser les escaliers et de réduire les risques de glissade.

Type : Percé - à visser

Dimensions : 45 x 2,8 mm

Longueur : 3M

### USE

Se pose en recouvrement d'un revêtement de sol ou d'un parquet. Utilisation en intérieur.

### REFERENCE

Ref : 1399

PLAT 36 MM - ALU - PERCE - 3M

### MATERIAL

Alliage haut de gamme du genre 6060-t5 – n755-2 traité thermiquement pour lui conserver une plus grande dureté. Anodisé (sans trace de pince de maintien) dans les épaisseurs les plus importantes pratiquées (15 microns).

Antidérapant : insert carborundum antidérapant, à insérer dans le nez de marche.

Conformité REACH

### FITTING MODE

Coupez le profilé à la longueur souhaitée. Repérer les trous et percez dans la chape. Placez les chevilles puis le profilé et vissez. Bien dégraisser le profil aluminium à l'alcool isopropylique avant de poser l'insert.

Retirez le papier silicone et collez la bande antidérapante.

Marouflez avec roulette 95137.

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :