


DATA SHEET

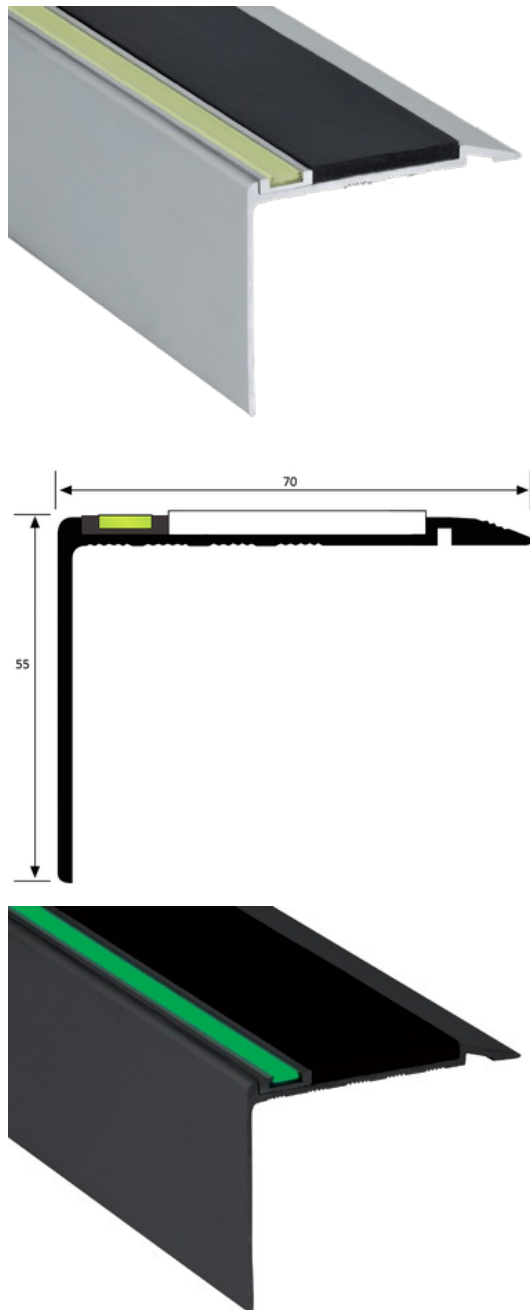

DESCRIPTION

Aluminium stair-nosing with anti-slip PVC insert
To secure stairs and reduce slip risk
Drilled - countersunk: to be screwed
Holes are drilled, countersunk and deburred
For available inserts, see ROMUS catalogue

USE

For overlapping a floor covering or a parquet or concrete floor.
Indoor use

REFERENCE

Ref : 1745

MATERIAL

REACH compliant

FITTING MODE

Cut the profile to the desired length. Locate the holes and drill in the subfloor. Place the ROMUS plugs 94154. Position the profile and fasten with screws VVVV.

> MAINTENANCE

Use standard cleaners (neutral detergents)

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :



- ▶ STAIR-NOSINGS
- ▶ "TECNIROMUS" HEAVY TRAFFIC
- ▶ TEC-LUM REF. 1745

DATA SHEET

The information contained in this document is provided for information purposes. Romus cannot be held liable for this information. The user or specifier will check the compatibility of the product technical data with the actual situation. Romus reserves the right to modify all or part of this document without prior notice.

Architect :

Project :

Email :

Tel :

Distributor :

Tel :

Email :